


**SURFACE MOUNT**

**ELECTROLYTIC 105 °C REDUCED SIZE DVJR**

SECTION 1

- SMT electrolytic
- Small can sizes
- Long life grade (up to 2000 hours @ 105°C)
- New expanded CV range
- Designed for automatic mounting and reflow soldering

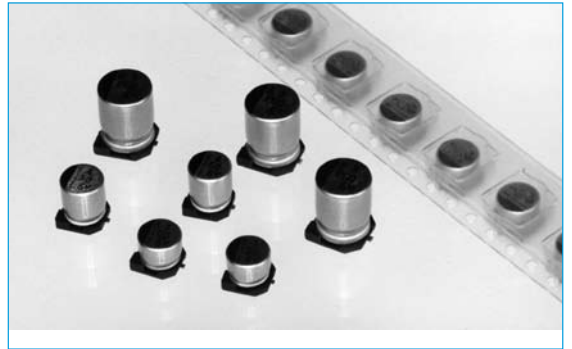


**SPECIFICATION**

Item	Performance	
Category Temperature Range (°C)	-50 to +105	
Tolerance of Rated Capacity (%)	± 20	
Leakage Current (µA)	Less than 0.01CV or 3 whichever is larger (after 2min) C: rated capacitance (µF)	
Tangent of Loss Angle (tanδ)	Rated Voltage (V)	6.3 10 16 25 35 50
	tanδ (max)	0.30 0.24 0.22 0.16 0.13 0.12
Characteristics at high and low temperature	Rated Voltage (V)	6.3 10 16 25 35 50
	Impedance Ratio (max) Z-25°C / Z+20°C	4 3 2 2 2 2
	Z-40°C / Z+20°C	8 5 4 3 3 3
Endurance (105°C) (Applied Ripple Current)	Test Time*	2000 hours
	Leakage Current	The initial specified value or less
	Percentage of Capacitance Change	Within 20% of initial value
	Tangent of Loss Angle	200% or less of the initial specified value
Shelf Life (85°C)	Test Time: 1000 hours: other items are the same as those for endurance. JIS C5101-1	
Applicable Standards	JIS C5101-1, -18 1998 (IEC600384-1 1992, -18 1993)	

\* at the end of part number on page 00 denotes 1000 hours

**OUTLINE DRAWING**

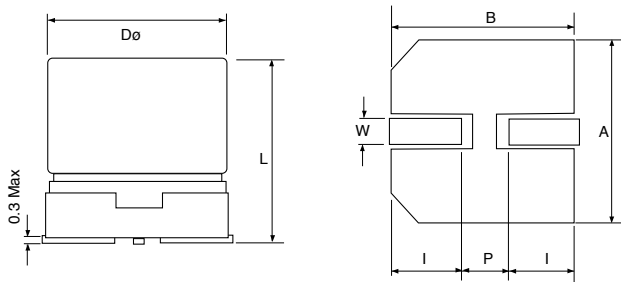

D Ø	L	A	B	I	W	P
4	5.3 +/- 0.2	4.3	4.3	2.0	0.5 to 0.8	1.0
5	5.3 +/- 0.2	5.3	5.3	2.3	0.5 to 0.8	1.5
6.3	5.3 +/- 0.2	6.6	6.6	2.7	0.5 to 0.8	2.0
8	6.5 +/- 0.3	8.4	8.4	3.4	0.5 to 0.8	2.3
8	10 +/- 0.5	8.4	8.4	3.0	0.7 to 1.1	3.1
10	10 +/- 0.5	10.4	10.4	3.3	0.7 to 1.1	4.7

**COEFFICIENT OF FREQUENCY FOR RATED RIPPLE CURRENT**

Frequency (Hz)/ Rated Voltage	50-60	120	1k	10k - 100k
6.3 to 16	0.8	1	1.15	1.25
25 to 35	0.8	1	1.25	1.40
50 to 63	0.8	1	1.35	1.50
100	0.7	1	1.35	1.50

**ORDERING INFORMATION**

<b>DVJR</b>	<b>47</b>	<b>35</b>	<b>LF</b>
Series	Capacitance	Voltage	Lead Free

**STANDARD PRODUCT & CASE SIZE TABLE DØxL mm**

Part No.	W.V (V.DC)	Cap (µF)	ESR (120Hz/+20C) max	Ripple Current (120Hz/+105C) (mA) rms max	Size dia/height
*DVJR226.3-LF	6.3	22	23	21	4x5.5
*DVJR476.3-LF	6.3	47	11	36	5x5.5
*DVJR1006.3-LF	6.3	100	5	61	6.3x5.5
DVJR2206.3-LF	6.3	220	2.3	178	8x10
DVJR3306.3-LF	6.3	330	1.5	178	8x10
DVJR4706.3-LF	6.3	470	1	324	10x10
DVJR10006.3-LF	6.3	1000	0.5	324	10x10
*DVJR3310-LF	10	33	13	31	5x5.5
DVJR22010-LF	10	220	2	178	8x10
DVJR100010-LF	10	1000	0.4	324	10x10
DVJR1016-LF	16	10	40	27	4x6
DVJR2216-LF	16	22	18	46	5X6
DVJR4716-LF	16	47	8.5	78	6.3X6
DVJR10016-LF	16	100	3.6	110	6.3x5.5
DVJR10016D8-LF	16	100	3.6	110	8x6.5
DVJR22016-LF	16	220	1.7	324	10x10
DVJR33016-LF	16	330	1.1	324	8x10
DVJR33016D10-LF	16	330	1.1	324	10X10
DVJR47016-LF	16	470	0.78	324	10x10
DVJR2225-LF	25	22	14	62	6.3X6
DVJR3325-LF	25	33	9	76	6.3X6
DVJR4725-LF	25	47	5.7	110	8x6.5
DVJR10025-LF	25	100	2.7	178	8x10
DVJR33025-LF	25	330	0.8	324	8x10
DVJR33025D10-LF	25	330	0.8	324	10x10
DVJR4.735-LF	35	4.7	53	23	4X6
DVJR1035-LF	35	10	25	39	5X6
DVJR2235-LF	35	22	11	65	6.3x6
DVJR3335-LF	35	33	6.5	110	8x6.5
DVJR4735-LF	35	47	4.6	110	6.3x6
DVJR4735D8-LF	35	47	4.6	110	8x6.5
DVJR10035-LF	35	100	2.2	324	8X10
DVJR22035-LF	35	220	0.98	324	10x10
DVJR0.150-LF	50	0.15	2321	4	4X6
DVJR0.2250-LF	50	0.22	1055	5	4X6
DVJR0.3350-LF	50	0.33	703	6	4X6
DVJR0.4750-LF	50	0.47	494	7	4X6
DVJR1.050-LF	50	1	232	12	4X6
DVJR2.250-LF	50	2.2	105	19	4X6
DVJR3.350-LF	50	3.3	70	22	4X6
DVJR4.750-LF	50	4.7	49	29	5X6
DVJR1050-LF	50	10	23	47	6.3X6
DVJR2250-LF	50	22	9.1	110	8x6.5
DVJR3350-LF	50	33	6	178	8x10
DVJR4750-LF	50	47	4.2	178	8x10
DVJR10050-LF	50	100	2	178	8x10
DVJR10050D10-LF	50	100	2	324	10x10