



液晶之友 电话: 020-33819057
 Http://www.lcdfriends.com

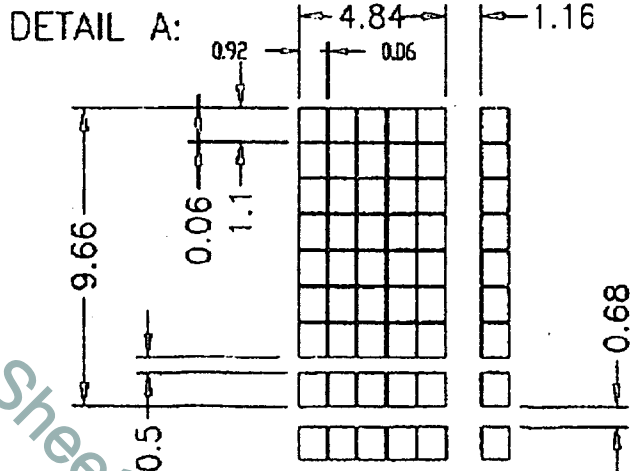

- NOTES:
1. DISPLAY TYPE: STN/BLUE MODE
 2. VIEWING DIRECTION: 6:00
 3. POLARIZER MODE: TRANSFLECTIVE/NEGATIVE
 4. DRIVE METHOD: DUTY 1/16 BIAS 1/5
 5. LCD OPERATING VOLTAGE: 4.5V
 6. OPERATING TEMP: 0°C~+50°C
 7. STORAGE TEMP: -20°C~+60°C
 8. CONTROLLER: KS0066UP-00CC
 9. BACKLIGHT: EL(WHITE)
 10. BEZEL IS TO BE PAINTED BLACK
 11. UNMARKED TOLERANCE: ±0.3mm

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
V _{SS}	V _{CC}	V _{BE}	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	EL1	EL2

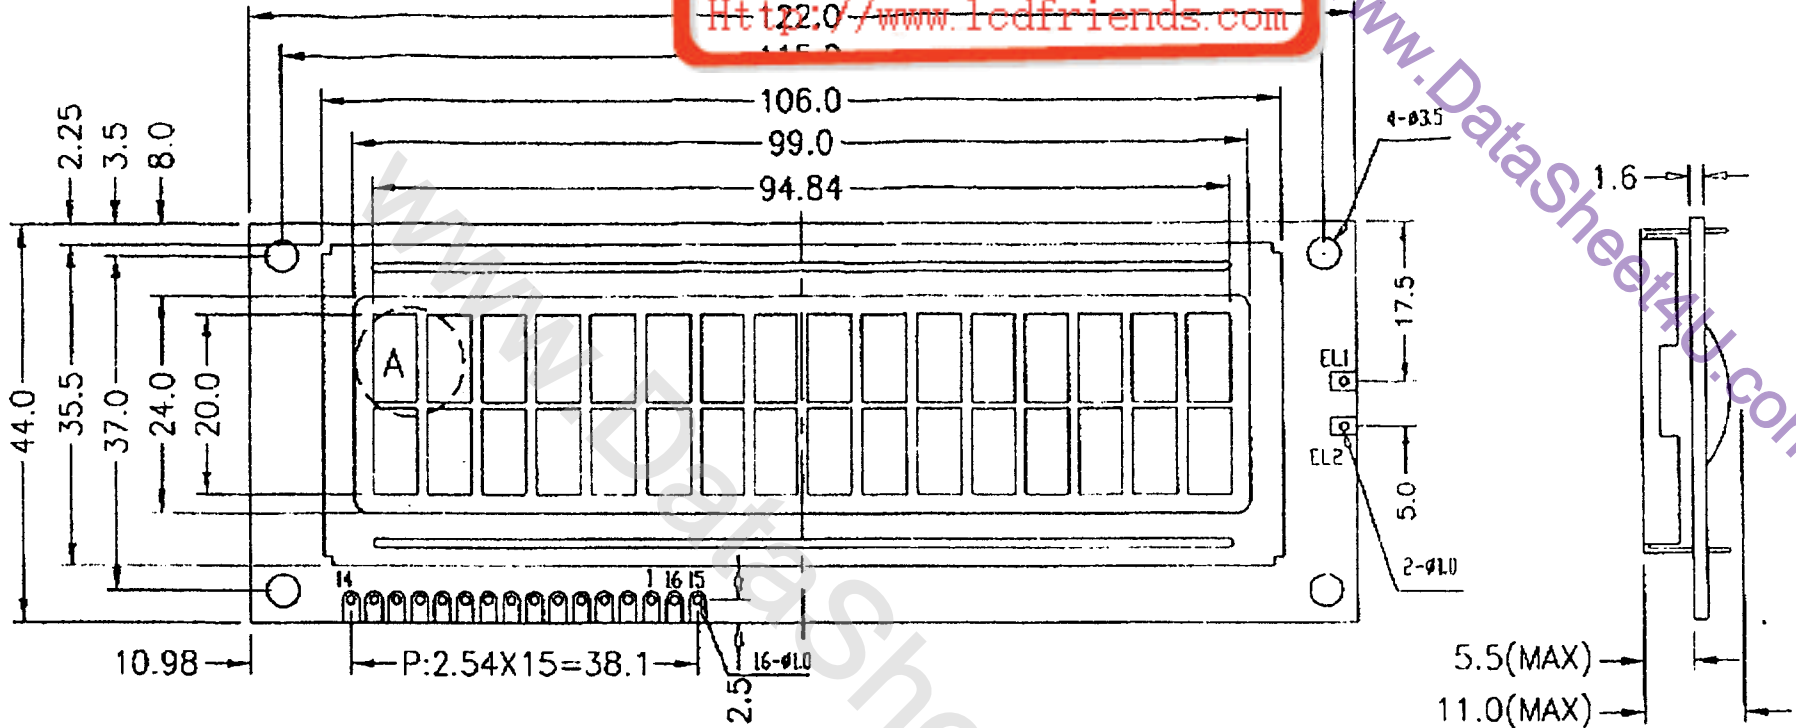

TIAN-MA MICROELECTRONICS CO.

6/F., CASTIC Building, Shennan Road, Central, Shenzhen, China

DRAWN BY: 罗静华	TITLE: TM162GFB7	
CHECKED BY: 潘伟华	DWG NO: G-1	
APPROVED BY: 王新荣	DWG NAME: TM162GF07G-1	SHEET NO: 0F
CONFIRMED BY:		