

**EVC 250 Main Contactor**

- Limiting continuous current 250A at 85°C
- Suitable for voltage levels up to 450VDC
- High peak current carrying capability up to 6000A

Typical applications

- DC high voltage high current applications
- Main contactors for hybrid, full battery electric vehicles and fuel-cell cars
- Battery charging systems



F720\_fbw1

**Contact Data**

Contact arrangement	1 Form X (SPST NO DM)
Rated voltage	450VDC
Max. switching voltage	500VDC, depending on load characteristics <sup>1)</sup>
Rated current	
Forward load current direction, cable 50mm <sup>2</sup>	250A
Limiting continuous current	
85°C, load cable 50mm <sup>2</sup>	250A
Limiting short-time current	
85°C, load cable 50mm <sup>2</sup>	300A 7min 600A 1min 6000A 25ms
Limiting make current	
resistive load, cable 50mm <sup>2</sup> , 23°C, 50VDC	50000x 250A
Limiting break current	
Forward load current direction	1x2000A
altitude max 5500m, 400VDC	5000x200A 50000x100A

Limiting break current	
Reverse load current direction	
resistive load, cable 50mm <sup>2</sup> , 23°C	20x200A
altitude max 5500m, 400VDC	10000x100A
Initial voltage drop at 100A	<40mV after 1min
Operate/release time max.	25ms at 14VDC (coil voltage)
Mechanical endurance	>200000 ops.

<sup>1)</sup> Values are influenced by system temperature and load current. Please contact TE Connectivity for details.

**Coil Data**

Max. coil temperature	155°C
-----------------------	-------

**Un-economized: single coil version for external economization<sup>2)</sup>**

Coil code	Rated voltage VDC	Min. pull-in current A	Max. pull-in current A	Min. hold current mA (DC)	Max. hold current A (DC)	Coil resistance Ω±10%
0001 <sup>3)</sup>	12	1.7 <sup>4)</sup>	4.0 <sup>4)</sup>	500 <sup>5)</sup>	1.5	4 <sup>6)</sup>

- <sup>2)</sup> Please refer to circuit recommendation diagram for coil 001.
- <sup>3)</sup> Requires external coil economizer, min. clamp voltage 36V (see circuit recommendation).
- <sup>4)</sup> Duration min. 100ms and max. 2s to avoid over temperature.
- <sup>5)</sup> Fully compliant with shock and vibration requirements.
- <sup>6)</sup> Avoid repetitive switching. The average dissipated power within a period of 10 seconds should not exceed 10W.

**Economized: dual coil version with internal switch**


Coil code	Rated voltage VDC	Pull-in voltage VDC	Hold voltage VDC	Maximum voltage VDC	Coil resistance Ω±10%
0002 <sup>7)</sup>	12	7.0 <sup>8)</sup>	4.0	16	3/36 <sup>9)</sup>

- <sup>7)</sup> Max. duty cycle 0.5Hz.
- <sup>8)</sup> Valid for cold coil at 23°C ambient temperature, max. rise time 100ms.
- <sup>9)</sup> Internal switch from 3Ω to 36Ω coil min. 120ms after pull-in. Demagnetization voltage is clamped at max. -60V. No external termination necessary. External termination could reduce switching capability. Please contact TE Connectivity for details.


**Insulation Data**

Initial dielectric strength	
between open contacts	2800VDC / 3mA
between contact and coil	2800VDC / 3mA
max. altitude	5500m
Insulation resistance after 2000A abuse test	
between open contacts	>200MΩ
between contact and coil	>200MΩ
Clearance/creepage	
acc. IEC 60664-1 (2007) for	over voltage category I, pollution degree 2

**Coil operating range (for coil 0002 only)**

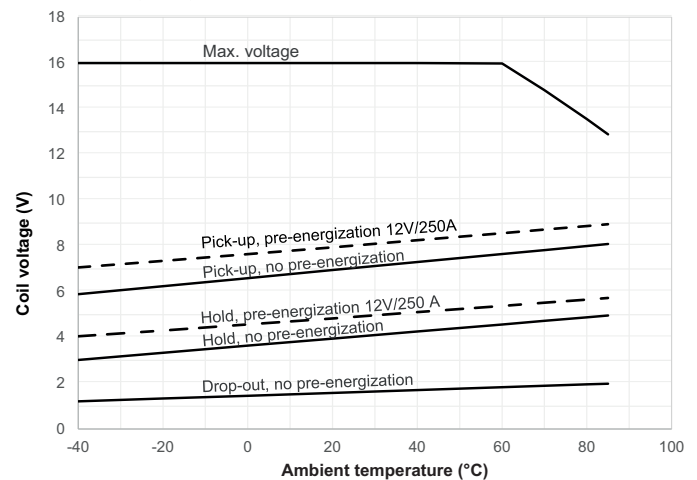

**Typical release time (coil switch-off until contact opens) versus clamp voltage for 12VDC energization**

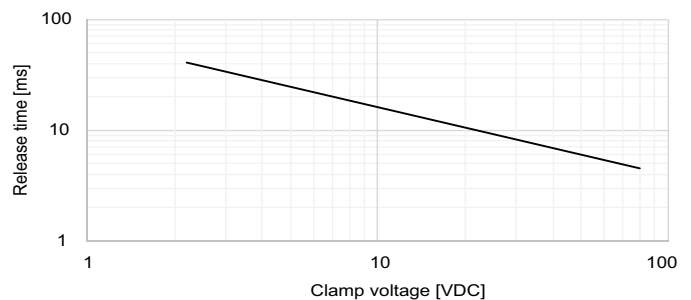

The values for switching capability are only valid for coil termination of 75VDC. For other termination voltages please contact TE Connectivity application engineering.


**EVC 250 Main Contactor** (Continued)

**Other Data**

Ambient temperature	-40°C to +85°C
Degree of protection dustproof:	IP54 <sup>10)</sup> (IEC 60529), RT I (IEC 61810)
Vibration resistance (functional) IEC 60068-2-6 (sine sweep)	10 to 500Hz, min. 10g.
Shock resistance (functional) <sup>11)</sup> IEC 60068-2-27 (half sine)	closed: 11ms, min. 40g open: 11ms, min. 20g
Terminal type	connector (coil) and screw (load)
Weight	approx. 520 to 600g (18.3 to 21.2oz), depending on version
Packaging unit and delivery	20 pcs.

10) Protection class applicable for all mounting orientations except load terminals upwards.  
11) No change in the switching state >10µs.

**Dimensions**

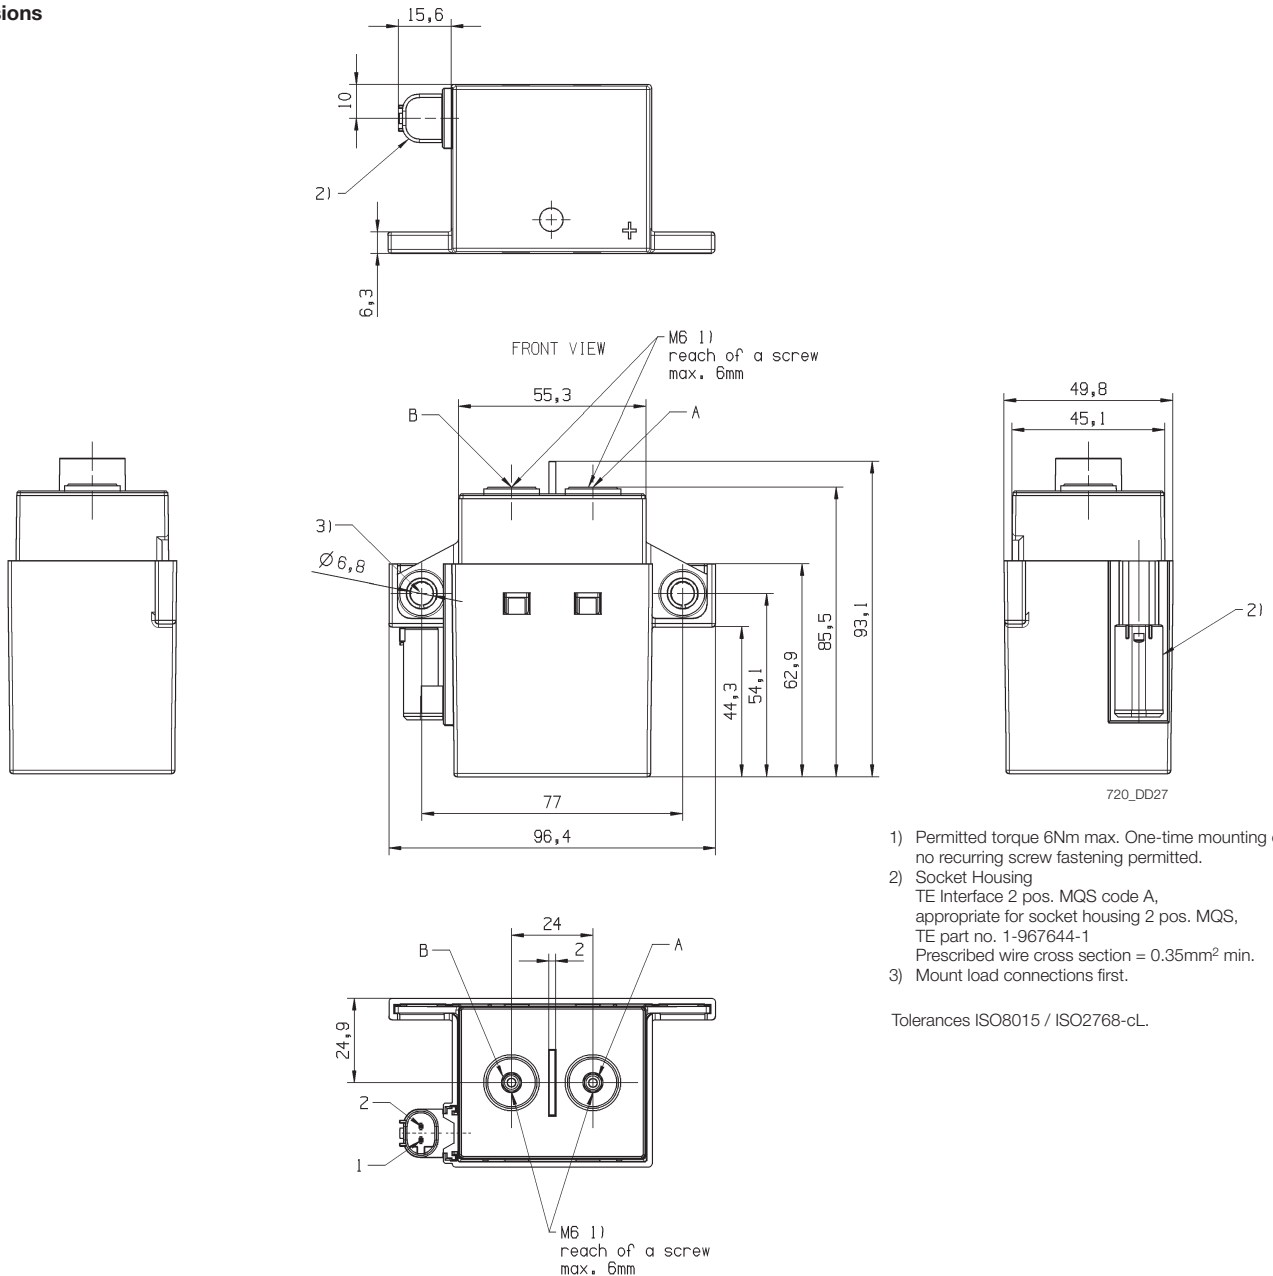

- 1) Permitted torque 6Nm max. One-time mounting only, no recurring screw fastening permitted.
- 2) Socket Housing  
TE Interface 2 pos. MQS code A, appropriate for socket housing 2 pos. MQS, TE part no. 1-967644-1  
Prescribed wire cross section = 0.35mm<sup>2</sup> min.
- 3) Mount load connections first.

Tolerances ISO8015 / ISO2768-cL.

**EVC 250 Main Contactor** (Continued)

**Product code structure for samples**

Typical product code

**V23720 -A 0001 -A 0 0 1**

**Designator**

**V23720** EVC 250 Main Contactor

**Relay version**

**A** Side mount fixation

**Coil**

**0001** 12V single coil for external economization

**0002** 12V dual coil with internal switch

**Rated voltage**

**A** 450VDC

**Contact material**

**0** Silver based

**Special features**

**0** None

**Coil connector**

**1** MQS sealed

Product code	Cont. arrang.	Coil	Circuit	Coil suppr.	Relay type	Resistance	Part number
V23720-A0001-A001	SPDT-NO-DM	12VDC	No economizer	External >40V	450VDC	4Ω	2-1904070-2
V23720-A0002-A001			Coil switch	Internal		Double coil 3/36Ω	4-1904065-7