

SEMIPONT™ 6

3-Phase Bridge Rectifier + IGBT braking chopper

SKDH 146/-L200


Preliminary Data

Features

- Compact design
- Two screws mounting
- Heat transfer and isolation through direct copper bonded aluminium oxide ceramic (DCB)
- High surge currents
- Up to 1600V reverse voltage
- UL recognized, file no. E 63 532

Typical Applications

- DC drives
- Controlled filed rectifiers for DC motors
- Controlled battery charger






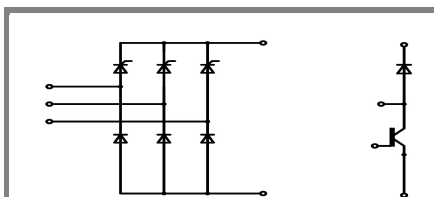







DH-L

V_{RSM} V	V_{RRM}, V_{DRM} V	$I_D = 140$ A (maximum value for continuous operation) ($T_s = 80$ °C)
900	800	SKDH 146/08 - L200

Absolute Maximum Ratings		$T_s = 25$ °C, unless otherwise specified	
Symbol	Conditions	Values	Units
Bridge - Rectifier			
I_D	$T_s = 80$ °C; inductive load	140	A
I_{FSM}/I_{TSM}	$t_p = 10$ ms; $\sin 180^\circ$; T_{jmax}	1250	A
i^2t	$t_p = 10$ ms; $\sin 180^\circ$; T_{jmax}	7800	A ² s
IGBT - Chopper			
V_{CES}/V_{GES}		600 / 20	V
I_C	$T_s = 25$ (70) °C	185 (140)	A
I_{CM}	$t_p = 1$ ms; $T_s = 25$ (70) °C	380 (300)	A
Freewheeling - CAL Diode			
V_{RRM}		600	V
I_F	$T_s = 25$ (70) °C	200 (150)	A
I_{FM}	$t_p = 1$ ms; $T_s = 25$ (70) °C	400 (300)	A
T_{vj}	Diode & IGBT (Thyristor)	- 40 ... + 175 (-40...+ 125)	°C
T_{stg}		- 40 ... + 125	°C
T_{solder}	terminals, 10 s	260	°C
V_{isol}	a.c. (50) Hz, RMS 1 min. / 1 s	3000 / 3600	V

Characteristics		$T_s = 25$ °C, unless otherwise specified			
Symbol	Conditions	min.	typ.	max.	Units
Diode - Rectifier					
V_{TO} / r_t	$T_j = 125$ °C		0,8 / 4		V / mΩ
$R_{th(j-s)}$	per diode			0,8	K/W
Thyristor - Rectifier					
$V_{F(TO)} / r_t$	$T_j = 125$ °C		0,85 / 3	0,9 / 4,5	V / mΩ
$R_{th(j-s)}$	per Thyristor			0,6	K/W
I_{GD}	$T_j = 125$ °C; d.c.	6			mA
V_{GT} / I_{GT}	$T_j = 25$ °C			3 / 150	V / mA
I_H / I_L	$T_j = 25$ °C		250 / 600		mA
$(dv/dt)_{cr}$	$T_j = 125$ °C	500			V/μs
$(di/dt)_{cr}$	$T_j = 125$ °C			125	A/μs
IGBT - Chopper					
$V_{CE(sat)}$	$I_C = 300$ A, $T_j = 25$ °C; $V_{GE} = 15$ V		1,45	1,85	V
$R_{th(j-s)}$	per IGBT			0,4	K/W
$t_{d(on)} / t_r$	valid for all values:		171 / 129		ns
$t_{d(off)} / t_f$	$V_{CC} = 300$ V; $V_{GE} = 15$ V; $I_C = 150$ A; $T_j = 125$ °C;		1718 / 110		ns
$E_{on} + E_{off}$	$T_j = 125$ °C; $R_G = 16$ Ω; inductive load		33,9		mJ
CAL - Diode - Freewheeling					
$V_{T(TO)} / r_t$	$T_j = 125$ °C		0,75 / 2,1	1,1 / 3	V / mΩ
$R_{th(j-s)}$	per diode			0,6	K/W
I_{RRM}	valid for all values:		50		A
Q_{rr}	$I_F = 150$ A; $V_R = -300$ V; $di_F/dt = -300$ A/μs		10		μC
E_{off}	$V_{GE} = 0$ V; $T_j = 125$ °C		0,9		mJ
Temperature Sensor					
R_{TS}	$T =$ °C;				Ω
Mechanical data					
M_S	mounting Torque		2,55	3,45	Nm

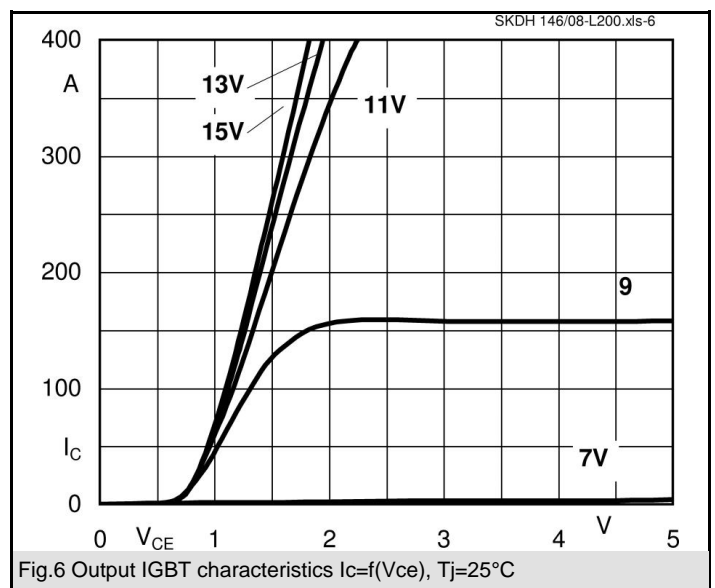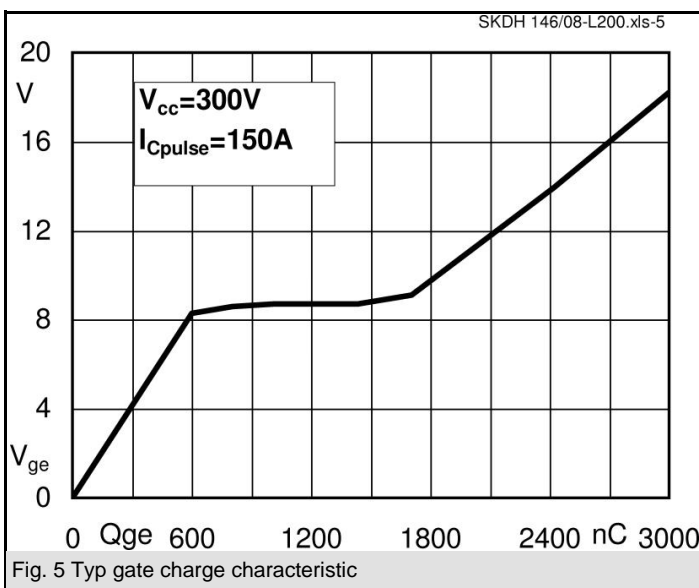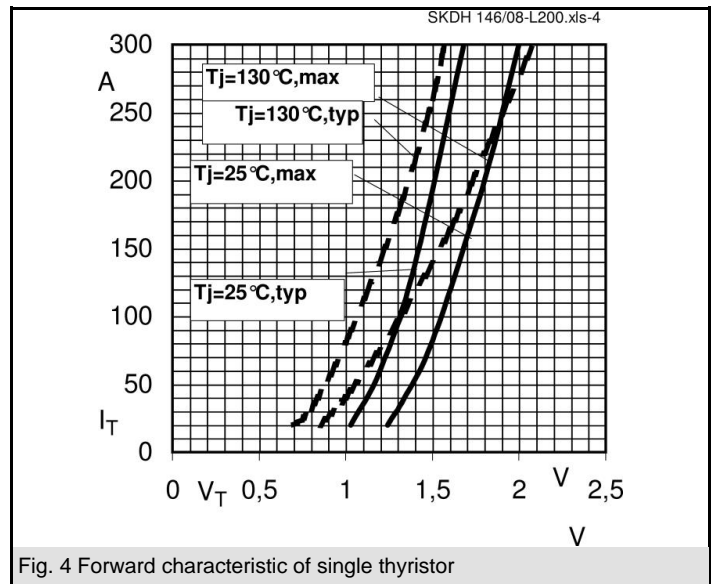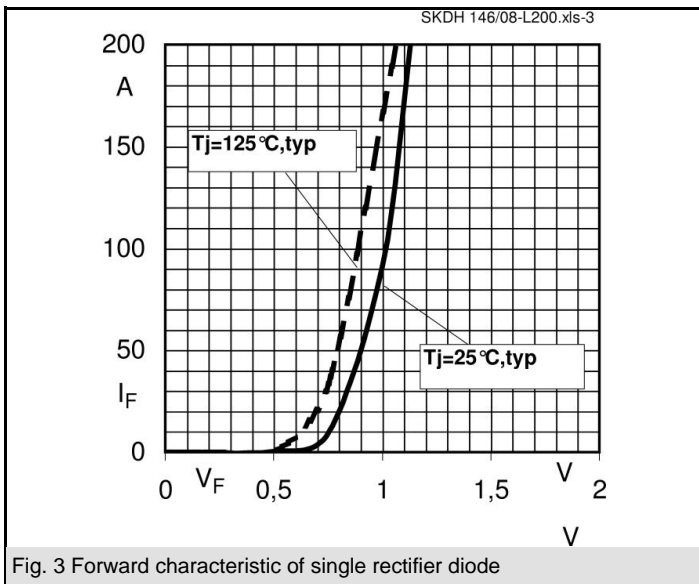
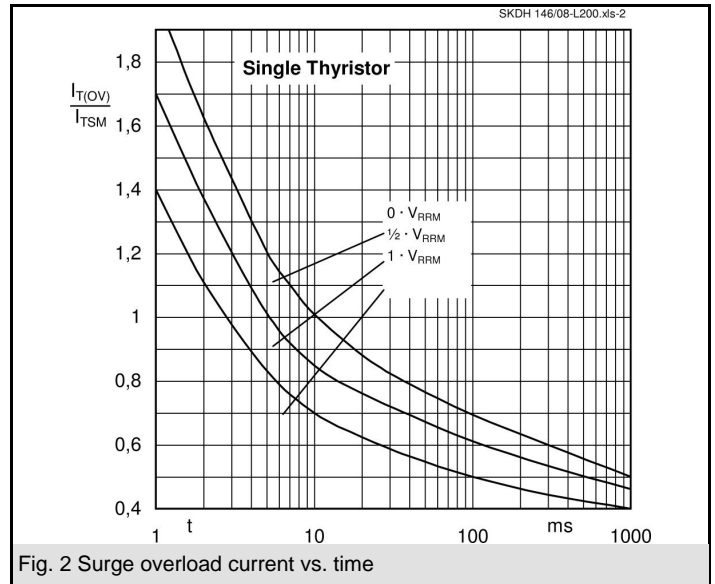
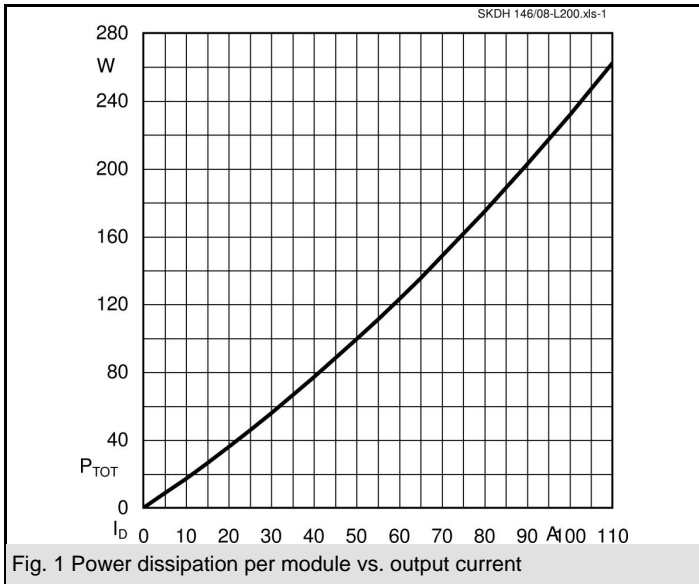


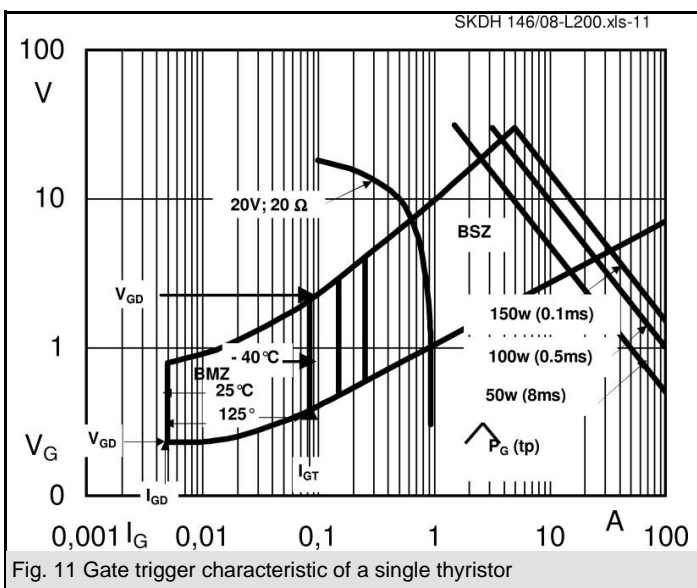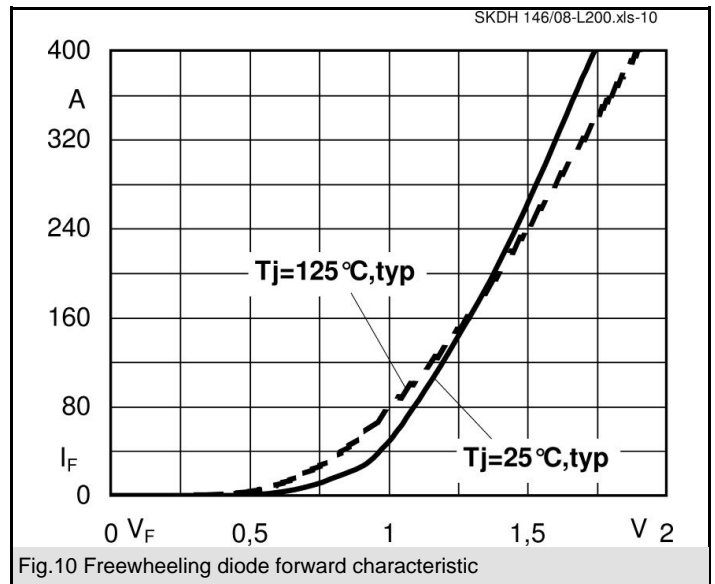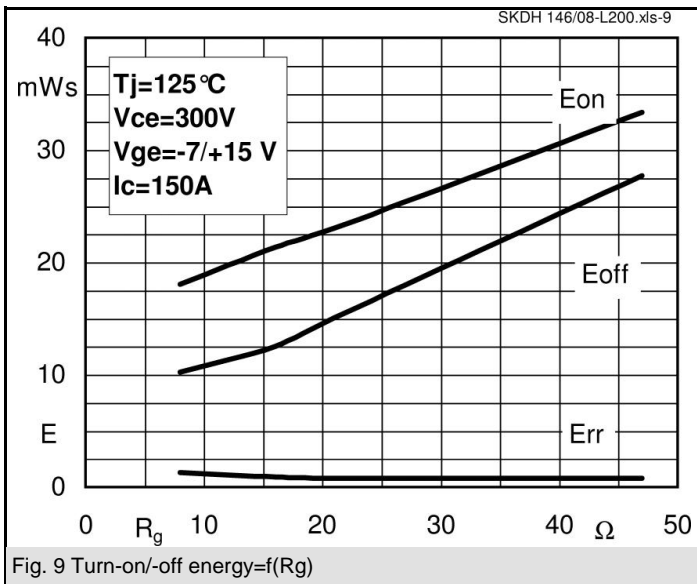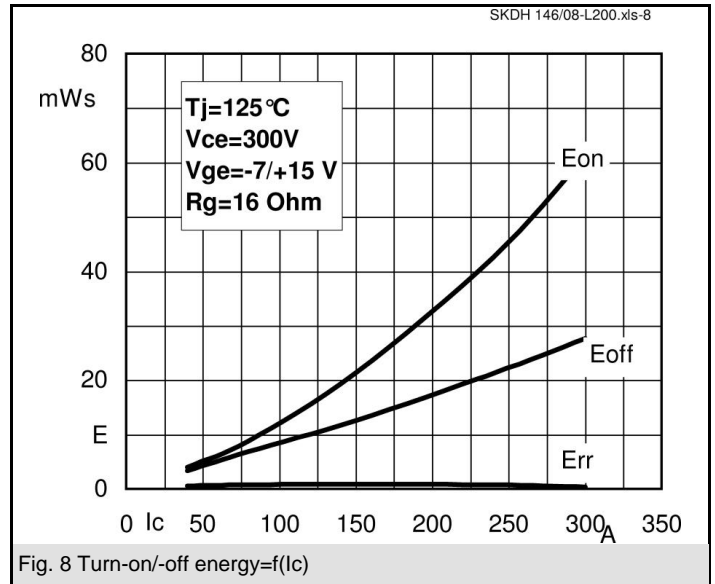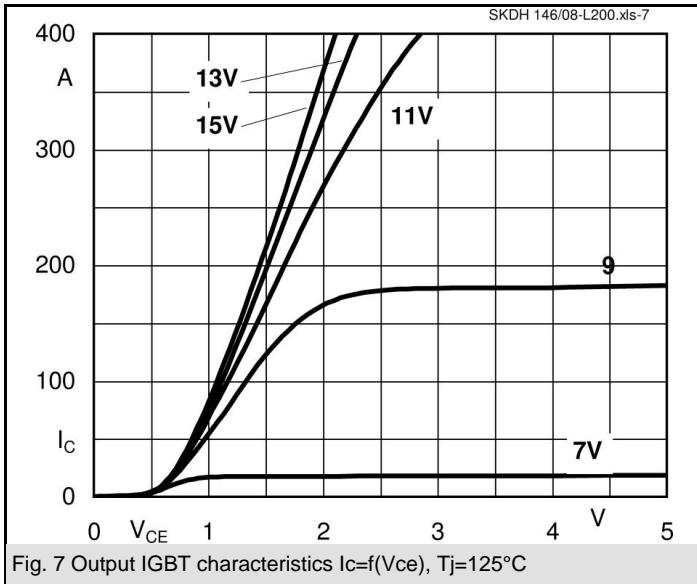


SKDH 146/-L200

UL recognized
File n°176; E 63 532

Dimensions in mm

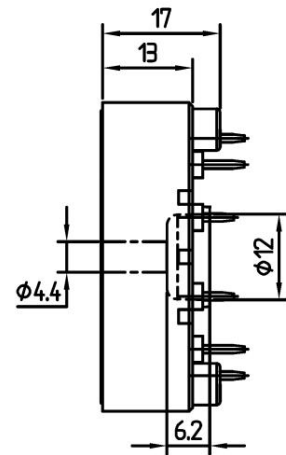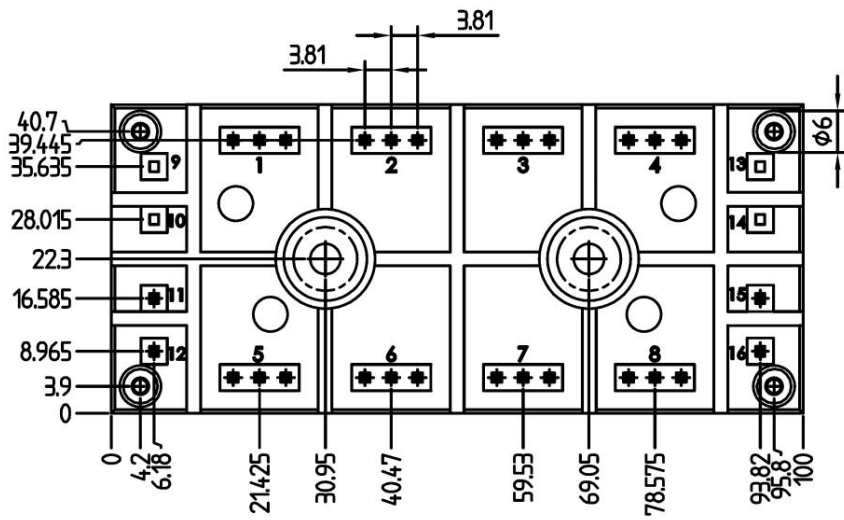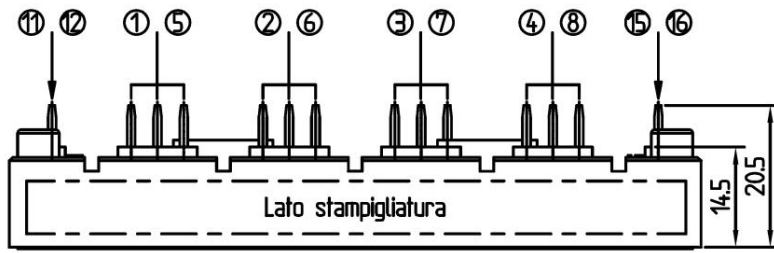

Case G 69

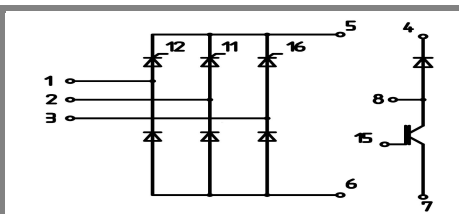

Case G 69

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.